

### Transform your space.

Wallworks Dimensions acoustical panels provide outstanding sound absorption and a unique appearance with minimal installation effort.



### Description

Dimensions high impact acoustical panels are the premier choice for applications that require unique, high performance acoustic panels. Easy to install and available in a wide range of fabrics, sizes and shapes.

### Core Material

High density rigid acoustical fibreglass containing 46% post-consumer content.

### Fire Performance

CAN/ULC S102: Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

ATSM E84: Flame Spread Index 20 or less. Smoke Developed Index 0.

### Thickness

Available in 1-1/2" to 4-1/2".

### Panel Sizes


Standard 12"x12", 24"x24", 24"x48"  
 Custom sizing available

### Mounting Options

Z-Clip, Impaling Clip or Adhesive direct to wall

### Acoustical Performance

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1-1/2"	0.32	0.75	0.94	0.98	1.01	1.04	0.95

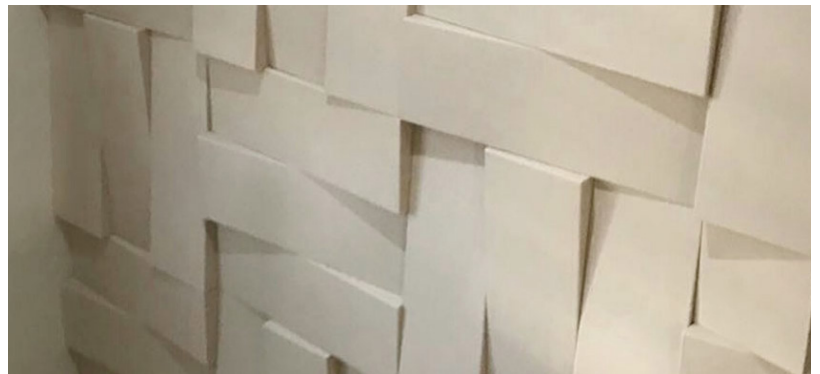

Find us on:




### Available Colours



B-010



B-020




B-030



B-040




B-050



B-060



B-070




B-080



B-090




B-100




B-110



B-120



B-130




B-140



B-150



B-160




B-170



B-180




B-190



B-200



B-210



B-220



B-230



B-240



B-250




B-260



B-270



B-280



B-290




B-300



B-310




B-320




B-330



B-340



B-350



B-360



B-370



B-380



B-390



B-400



B-410



B-420



B-430